

NW-108K5E-180-XX


Cat. 5E Keystone Jack, 1 Gbps rated, 110 IDC, 180 deg., low profile.

Colours: XX= BL, WH, GN, RD

Category 5E Keystone Jack from New World Telecom is engineered for up to 1 Gbps. Featuring enhanced NEXT and Low Return Loss together with protection against Alien Cross talk that exceeds Cat. 5E standards for 1 Gbps. The PCB design eliminates the split pairs to reduce installation time. Meets or exceeds EIA /TIA 568.2-10 standards and IEEE 802.3 an rev 1.0 application requirements.

Features:

- * Engineered for up to 1 Gbps cabling system
- * Low profile, fits narrow spaces in Multi-port Decora plates and Blank Patch Panels
- * PCB design eliminates the split pairs to reduce installation time
- * 110 IDC and Krone IDC compatible
- * Includes an integrated T568A/B Color Codes
- * Compatible with any NWT Flush Mount Plate and Surface Mount Boxes.
- * Exceeds EIA /TIA 568-B.2 standards and IEEE 802.3 an rev 1.0 application requirements.
- * 50 Micron gold over 100 Micron nickel plated on Modular Jack pins.
- * IDC accepts 23 - 24 AWG solid copper wire cable
- * UL/ CUL approved according to EIA/ TIA standards
- * Colours: XX= BL, WH, GN, RD

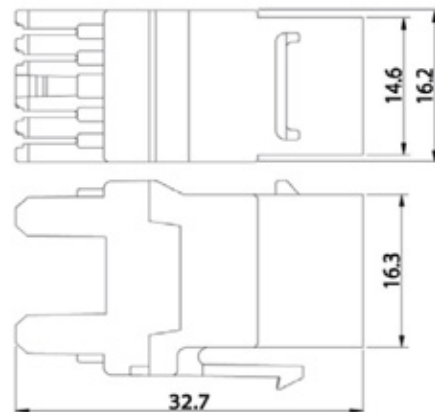

EIA/ TIA - 568-B.2 Connecting Hardware Performance Requirements

Cat.5e	Bandwidth	NEXT	FEXT	Attenuation	Return Loss
NW-108K5E-180-XX	(dB) at 100 MHz	>43	>35.1	<0.40	>20



NW-108K5E-180-XX

Cat.5E UTP 180 deg. Keystone Jack

Ordering Information

Items/ Polybag	Items/ Inner box	Items/ Outer box
1	100	400
Colours	XX=Colours, WH, BL, RD, GN	